

SHOCK ABSORBING
LANYARDS

NEW
DBI-SALA®
SHOCK
ABSORBING
LANYARDS.
SMALLER,
LIGHTER,
STRONGER.



THE ULTIMATE IN FALL PROTECTION

SHOCK ABSORBING LANYARDS

NEW SHOCK PACK

SMALLER & LIGHTER. RATED TO
130KG MAX. USER WEIGHT

REVOLUTIONARY NEW HI-10™ ENERGY ABSORBING TECHNOLOGY

5 X STRONGER THAN STEEL,
EXTREMELY COMPACT AND DURABLE

I-SAFE™

EACH PRODUCT CAN BE TRACKED
WITH OUR RADIO FREQUENCY
IDENTIFICATION TAG AND IS MARKED
WITH A UNIQUE SERIAL NUMBER
FOR INSPECTION PURPOSES

IDENTIFICATION LABELS

EASY TO ACCESS, FULLY PROTECTED

NYLON REFLECTOR STRIPS

BETTER VISIBILITY IN LOW LIGHT CONDITIONS

BODY CONNECTOR

ALUMINIUM TWIST LOCK OR
TRIPLE LOCK OPTIONS FOR
GREATER SECURITY



EZ STOP™ EXPANDER™

- Elasticated webbing reduces length by up to 50cm when not under tension.
- Reduced trip or snarling hazard.
- Light weight aluminium automatic twist locking carabineer for easy & secure body connection.
- Available with light weight aluminium automatic twist locking carabineer or 60mm opening scaffold hook anchor connectors.



SPECIFICATIONS

Leg Material	35mm polyester webbing
Body Connector	Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Anchor Connectors	AJ527/0, Aluminium, 60mm opening, 22kN breaking strength or Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Maximum User Weight	130kg
Standards	EN355

1245536	1.25m		1		20mm	(A)		20mm	(A)	0.60
1245537	1.25m		1		20mm	(A)		60mm	(A)	0.90
1245540	2.00m		1		20mm	(A)		20mm	(A)	0.65
1245541	2.00m		1		20mm	(A)		60mm	(A)	1.00
1245534	2.00m		2		20mm	(A)		60mm	(A)	1.50

LANYARD ICON KEY

General



Dimension



Kilogrammes



i-Safe™



Certification



Material Type

Type



Material:
Aluminium



Material:
Steel

Lanyards



Lanyard



Twin Leg



Tie-Back



Loops with Thimbles



Carabiner



Screw Carabiner



Gate Strength
(Value)



Size of gate opening



Twist Lock



Triple Lock



Connector:
Lanyard End



Connector:
User End



Connector:
Adjuster End



Rope Type



Wrapbax™ Hook



Scaffold Hook



Snap Hook























SHOCK ABSORBING
LANYARDS

EZ STOP™ TIE BACK

- Adjustable tie back connection design can be used to create an anchor point from an existing structure.
- Also suitable for connecting directly to an anchor point offering great versatility in different environments.
- Light weight aluminium automatic twist locking carabineer for easy & secure body connection.
- Light weight 23kN aluminium snap hook anchor/tie back connector.



SPECIFICATIONS	
Leg Material	35mm polyester webbing
Body Connector	Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Anchor Connectors	AJ527/0, Aluminium, 60mm opening, 22kN breaking strength or Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Maximum User Weight	130kg
Standards	EN355


										
 EN355										
1245542	2.00m		1		20mm			21mm		1.50
1245550	2.00m		2		20mm			21mm		2.00



EZ STOP™ WRAPBAX 2™

- Highly durable lanyard for users predominantly working in tie back applications.
- Heavy duty, 57kN tensile strength abrasion resistant webbing for long lanyard life.
- Light weight aluminium automatic twist locking carabineer for easy & secure body connection.
- Unique, durable Wrapbax™ 2 Steel tie back hook for fast, simple, secure attachment.

SPECIFICATIONS	
Leg Material	5mm thick nylon web, 57kN tensile strength
Body Connector	Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Anchor Connectors	Steel Wrapbax™ 2 Tie Back hook, 21mm opening size, 22kN breaking strength
Maximum User Weight	130kg
Standards	EN355

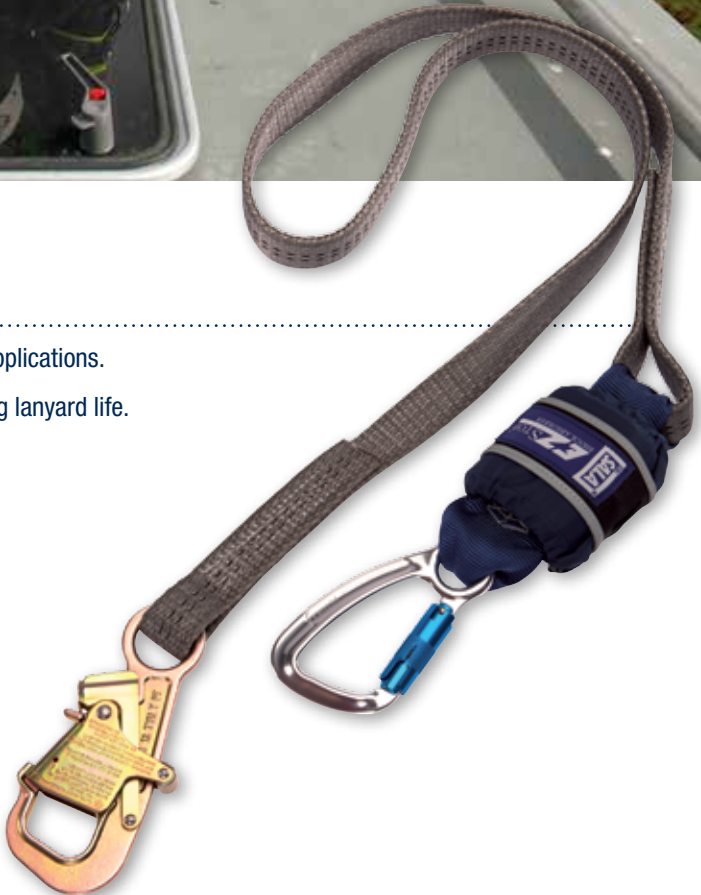

		Key		Key		Key		Key		Key		Key	
CE EN355													kg
1245544	2.00m		1		20mm	(A)		21mm	(S)				1.00
1245533	2.00m		2		20mm	(A)		21mm	(S)				1.70

SHOCK ABSORBING LANYARDS

EZ STOP™ EDGE TESTED MODELS

Daily, thousands of people working at height are exposed to falls over or around edges. Those working on electrical pylons, steel fabrications, scaffolding, flat roof structures or telecoms towers today may be using shock absorbing lanyards that are not durable enough to withstand a fall across such a structure. DBI-SALA®'s answer to this is our new range of lanyards, designed to offer greater security to users exposed to falls over or around edges and tested rigorously over a 0.5mm radius edge. All edge tested products in the DBI-SALA® range are differentiated from DBI-SALA® standard shock absorbing lanyards and bear the Edge tested logo.

- The fall arrest solution for all users working at height exposed to falls around or over edges.
- 12 mm diameter rope offers extreme durability whilst maintaining flexible handling for ease of use. Orange accenting indicates suitability for edge applications.
- Light weight aluminium snap hook or automatic triple locking carabiner for easy & secure body connection.
- Available with light weight aluminium automatic triple locking carabiner or 60mm opening scaffold hook anchor connectors.



SPECIFICATIONS	
Leg Material	12mm diameter (material) rope
Body Connector	AJ512/0, Aluminium triple Lock, 22mm opening size, 25kN breaking strength or AJ567/0, Aluminium, 21mm opening size, 22kN breaking strength
Anchor Connectors	AJ527/0, Aluminium, 60mm opening, 22kN breaking strength or AJ512/0, Aluminium Triple Lock, 22mm opening size, 25kN breaking strength
Maximum User Weight	100kg
Standards	EN355

CE EN355	↔	🔗	🔗	🔑			🔑			kg	⚠️
				🔑	🔑	🔑	🔑	🔑	🔑		
1245552	2.00m		1	🔑	21mm	Ⓐ	🔑	60mm	Ⓐ	1.10	▪
1245555	1.50m	▪	2	🔑	21mm	Ⓐ	🔑	60mm	Ⓐ	1.50	▪
1245553	2.00m		1	🔑	20mm	Ⓐ	🔑	22mm	Ⓐ	0.90	▪
1245554	2.00m		1	🔑	20mm	Ⓐ	🔑	60mm	Ⓐ	1.10	▪

EZ STOP™ ROPE

- 10.5mm diameter braded rope with sewn terminations and thimbles to protect high abrasion areas from wear
- Light weight aluminium automatic twist locking carabiner for easy & secure body connection.
- Available with light weight aluminium automatic twist locking carabiner or 60mm opening scaffold hook anchor connectors.
- Not designed for use in edge applications - please see our edge tested shock absorbing lanyards.



SPECIFICATIONS	
Leg Material	Material, diameter
Body Connector	Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Anchor Connectors	AJ527/O, Aluminium, 60mm opening, 22kN breaking strength or Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Maximum User Weight	130kg
Standards	EN355

CE EN355										kg
1245546	1.25m		1		20mm	A		20mm	A	0.60
1245547	2.00m		1		20mm	A		20mm	A	0.70
1245548	2.00m		1		20mm	A		60mm	A	1.00
1245549	1.25m		1		20mm	A		60mm	A	0.90
1245545	2.00m	■	2		20mm	A		60mm	A	1.40

EZ STOP™ WEB

- General purpose fall arrest lanyards with polyester webbing leg material.
- Fixed lengths of 1.25m & 2m are available along with an adjustable model for applications where other lengths are required.
- Light weight aluminium automatic twist locking carabiner for easy & secure body connection.
- Available with light weight aluminium automatic twist locking carabiner or 60mm opening scaffold hook anchor connectors.



SPECIFICATIONS	
Leg Material	Material, width (web) / diameter (rope) & breaking strength
Body Connector	Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Anchor Connectors	AJ527/O, Aluminium, 60mm opening, 22kN breaking strength or Aluminium Twist Lock, 20mm opening, 28kN breaking strength
Maximum User Weight	130kg
Standards	EN355

CE EN355										kg
1245531	1.25m		1		20mm	A		20mm	A	0.60
1245543	1.40-2.00m		1		20mm	A		60mm	A	1.10
1245530	1.25m		1		20mm	A		60mm	A	0.90
1245532	2.00m	■	2		20mm	A		60mm	A	1.40
1245538	2.00m		1		20mm	A		20mm	A	0.70
1245539	2.00m		1		20mm	A		60mm	A	1.00

capital

S A F E T Y

EUROPE, MIDDLE EAST & AFRICA

France

Le Broc Center
Z.I. 1re Avenue – BP15
06511 Carros Le Broc Cedex
FRANCE

t: +33 (0)4 97 10 00 10
f: +33 (0)4 93 08 79 70

United Kingdom

5a Merse Road
North Moons Moat
Redditch, Worcestershire
B98 9HL UK

t: +44 (0) 1527 548 000
f: +44 (0) 1527 591 000

Dubai

ME Branch Office
PO Box 17789
JAFZA, Dubai – U.A.E

t: 00 800 999 55500
f: +33 (0)4 93 08 79 70

Germany

Hagener Strasse 44
D-57489 Drolshagen
Deutschland

t: +49 (0) 2 76 18 33 82 29
f: +33 (0)4 93 08 79 70

CUSTOMER SERVICES

☎ 00 800 999 55500

information@capitalsafety.com
www.capitalsafety.com

GLOBAL LEADER IN FALL PROTECTION

Capital Safety is one of the world's leading manufacturers of fall protection and rescue equipment, with decades of experience and a legacy of innovation.

We understand the industries we serve and listen to the workers in the field. We employ the best engineers to create innovative solutions and patent the products that keep workers safe at heights around the world. Capital Safety has the best quality and largest range of fall protection products in the industry. But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships and a vast network of authorized distributors, certified installers and service centres. We offer on-site and in-house training.

Look for complete solutions in our extensive line of DBI-SALA® and Protecta® products.

All rights reserved. The material contained herein is copyrighted; no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without prior written permission from Capital Safety.

Ref: 9700822

